


CASTAIR

COMPRESSOR INDUSTRIAL SERIES TWO STAGE

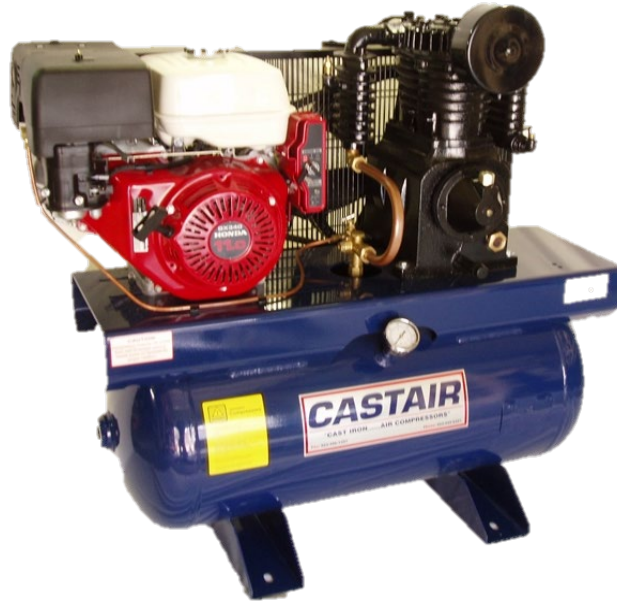

I13GH3HC1

INDUSTRIAL SERIES

GAS HONDA - 2 STAGE - WITH FUEL TANK

HONDA MODEL	Starter Type	Tank Gal./Type	Pump R.P.M.	CFM @ 0-PSI	CFM@ 175 PSI	LxWxH DIMENSION	Wt. Lbs.	UNIT MODEL
GX390	Rope/elec.	30 Horiz.	995	35.0	28.1	46x20x43	550	I 13GH3HC1

COMPRESSOR PUMP

- *All Cast Iron for long life and quiet operation.
- *Slow 995 R.P.M. for quiet operation and long life.
- *Tapered roller bearings at both ends of crankshaft for superior support & less friction.
- *Precision steel connecting rods with automotive type rod insert bearings at crankshaft & needle bearings at wrist pin for long service, life, & reliability.
- *Disc & spring valves for easy service, higher efficiency and reliability.
- Pistons have 4-rings for higher efficiency & less oil carry-over.
- *Automotive type intake filter/silencer. *Sight glass to insure proper oil level at a glance.

ENGINE, TANK, CONTROLS

- *Honda Industrial grade engine with 12-volt alternator, rope & electric start and fuel tank.
- *Pilot valve with built in check valve. *Copper discharge tube.
- *Powder coated ASME tank with channel feet.
- *ASME safety valves. *Metal belt guard totally enclosed.