


# CASTAIR

## INDUSTRIAL SERIES COMPRESSOR/GENERATOR/WELDER

GAS HONDA - 2 STAGE - WITH FUEL TANK

UNIT  
SPEC'S

Honda Model	Starter Type	Tank Gal-Type	Pump RPM	CFM @ 0 PSI	CFM @ 175 PSI	LxWxH Dimension	Wt. LBS	Unit Model
GX390	Rope/Elec.	30 horiz.	808	24.7	19.7	46x20x43	650	I 13GH3HC1GW

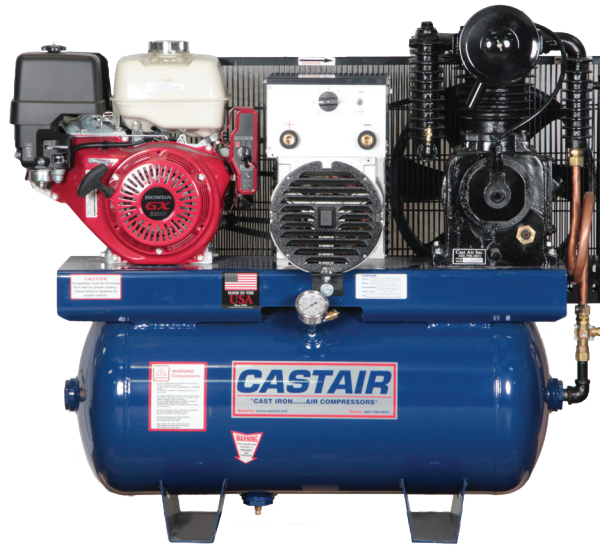

### COMPRESSOR PUMP:

- All Cast Iron for long life and quiet operation.
- Slow 808 RPM for quiet operation and long life.
- Tapered roller bearings at both ends of crankshaft for superior support & less friction.
- Precision steel connecting rods with automotive type rod insert bearings at crankshaft & bearings at wrist pin for long service, life, & reliability.
- Disc & spring valves for easy service, higher efficiency and reliability.
- Pistons have 4-rings for higher efficiency & less oil carry-over.
- Automotive type intake filter/silencer.
- Sight glass to insure proper oil level at a glance.

### GENERATOR:

- 5500 watt, with 2-115 volt and 1-230 volt outlets.

### WELDER:

- 40 to 240 AMP D.C. arc welder with universal 50mm quick connectors.
- Duty cycle: 130amps = 100%, 180amps = 60%, 240amps = 35%.

### ENGINE / TANK / CONTROLS:

- Honda Industrial grade engine with 12-volt alternator, rope & electric start and fuel tank.
- Pilot valve with built in check valve.
- Copper discharge tube.
- Powder coated ASME tank with channel feet.
- ASME safety valves.
- Metal belt guard totally enclosed.
- Honda oil drain kit.
- Hour meter (optional): #HRM50M
- Right from the Start Kit (optional): #RFS001
- Battery & cables sold separately