


# CASTAIR

## INDUSTRIAL SERIES TWO STAGE COMPRESSOR

GAS HONDA - 2 STAGE - WITH FUEL TANK

UNIT  
SPEC'S

Honda Model	Starter Type	Tank Gal-Type	Pump RPM	CFM @ 0 PSI	CFM @ 175 PSI	LxWxH Dimension	Voltage Amps	Wt. LBS	Unit Model
GX630	Elec.	30 horiz.	885	55.0	43.6	50x34x43	230/22	640	I20GH3HC2

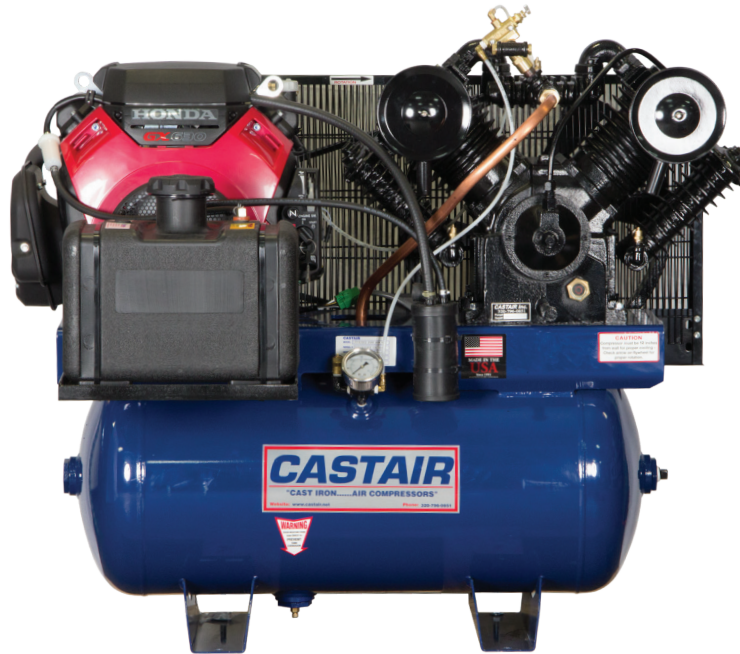

### COMPRESSOR PUMP:

- All Cast Iron for long life and quiet operation.
- Slow 885 RPM for quiet operation and long life.
- Tapered roller bearings at both ends of crankshaft for superior support & less friction.
- Precision steel connecting rods with automotive type rod insert bearings at crankshaft & bearings at wrist pin for long service, life, & reliability.
- Disc & spring valves for easy service, higher efficiency and reliability.
- Pistons have 4-rings for higher efficiency & less oil carry-over.
- Automotive type intake filter/silencer.
- Sight glass to insure proper oil level at a glance.

### ENGINE / TANK / CONTROLS:

- Honda Industrial grade engine with 12-volt alternator, rope & electric start and fuel tank.
- Pilot valve and inline check valve.
- Copper discharge tube.
- Powder coated ASME tank with channel feet.
- ASME safety valves.
- Metal belt guard totally enclosed.
- Honda oil drain kit.
- Hour meter included.
- Battery & cables sold separately.
- Right from the Start Kit (optional): #RFS001