CASTAIR

COMPRESSOR
INDUSTRIAL SERIES TWO STAGE

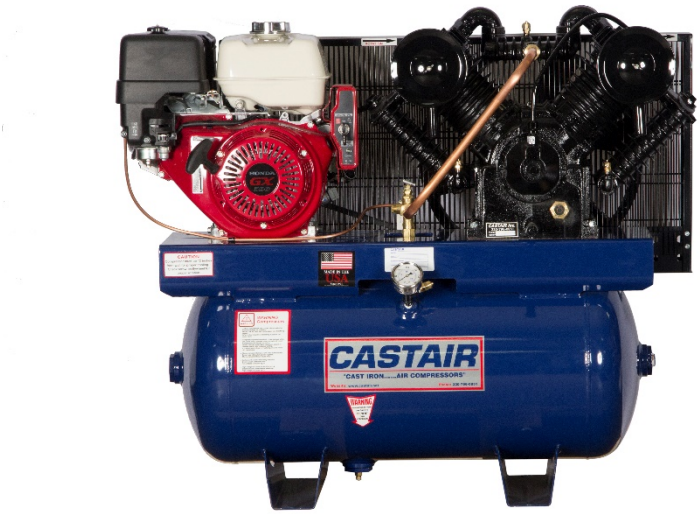

I13GH3HC2

INDUSTRIAL SERIES **GAS HONDA - 2 STAGE - WITH FUEL TANK**

HONDA MODEL	Starter Type	Tank Gal./Type	Pump R.P.M.	CFM @ 0-PSI	CFM@ 175 PSI	LxWxH DIMENSION	Wt. Lbs.	**UNIT MODEL**
GX390	Rope/elec.	30 Horiz.	635	37.0	30.3	48x22x40	605	**I 13GH3HC2**

COMPRESSOR PUMP

***All Cast Iron for long life and quiet operation.**
***Slow 635 R.P.M. for quiet operation and long life.**
***Tapered roller bearings at both ends of crankshaft for superior support & less friction.**
***Precision steel connecting rods with automotive type rod insert bearings at crankshaft & bearings at wrist pin for long service, life, & reliability.**
***Disc & spring valves for easy service, higher efficiency and reliability.**
Pistons have 4-rings for higher efficiency & less oil carry-over.
***Automotive type intake filter/silencer. *Sight glass to insure proper oil level at a glance.**

ENGINE, TANK, CONTROLS

***Honda Industrial grade engine with 12-volt alternator, rope & electric start and fuel tank.**
***Pilot valve with built in check valve.**
***Copper discharge tube.**
***Powder coated ASME tank with channel feet.**
***ASME safety valves. *Metal belt guard totally enclosed.**